



DBN601



DBN620



DBN610

USER BENEFITS

- Suitable for various work, where precision and a clean finish matter, such as installing baseboards, crown molding, trim and building cabinets or fine furniture.
- Rapid firing capability has been achieved by incorporating a pneumatic spring structure driven by a BL motor
- Window for checking remaining nail quantity
- Easy driving depth adjustment by dial for a wide variety of finish applications
- Slim nose for easy nailing access in confined areas and accurate nail placement
- Built in LED light for better visibility in poorly lit areas
- Tool-less depth adjustment for precise flush and countersink nailing

TECHNICAL SPECIFICATIONS

	DBN601	DBN610	DBN620
Accumulator voltage	18 V LXT		
Magazine capacity	110	110	108
Nail length	19-64 mm	32-64 mm	32-64 mm
Nail type	16 GA finish nails	16 GA finish nails	15 GA finish nails
Dimensions (L×W×H)	276 x 113 x 320 mm	300 x 116 x 331 mm	300 x 142 x 344 mm
Weight* ¹	3,3 kg	3,3 kg	3,4 kg

*¹With BL1860B battery

AVAILABLE AS

DBN601Z without battery and charger | DBN610Z without battery and charger | DBN620Z without battery and charger

PRODUCT HIGHLIGHTS



Anti-dry fire mechanism
Avoids dry firing by locking the contact arm when the number of the remaining nails gets low.



2 operation modes
Single / continuous nailing with contact actuation.



Bumper
Protects workpieces from scratches or damage.



Easy jamm clearing
Nails can be removed without tools in case of jamming.

ACCESSORIES

Hook
346317-0



Nose adapter
422B94-1



NOISE AND VIBRATION

DBN601/ DBN610	Sound pressure level: 83 dB(A) , Sound power level: 94 dB(A) , Vibration level: 2,5 m/s²
DBN620	Sound pressure level: 86 dB(A) , Sound power level: 97 dB(A) , Vibration level: 2,7 m/s²

COMPATIBILITY

Recommended: **BL1815N, BL1820B, BL1830B, BL1840B, BL1850B, BL1860B**

RELATED PRODUCTS



18 V LXT
DBN900
Cordless framing nailer



18 V LXT
DFN350
Cordless brad nailer



18 V LXT
DPT353
Cordless pin nailer



USER BENEFITS

- Suitable for light to medium duty applications, where a clean finish is important, including: installing trim and molding, holding parts while glue dries, securing cabinet backs ...
- Excellent rapid-fire performance with a pneumatic feel achieved by an air spring mechanism
- Easy driving depth adjustment by dial for a wide variety of finish applications
- Slim nose for accurate nail placement
- Built in LED light for better visibility in poorly lit areas

TECHNICAL SPECIFICATIONS

Accumulator voltage	18 V LXT
Magazine capacity	110
Nail length	15-50 mm
Nail type	18 GA brad nails
Dimensions (L×W×H)	263 x 111 x 301 mm
Weight* ¹	3,0 kg

*¹With BL1860B battery

AVAILABLE AS

DBN501Z without battery and charger

PRODUCT HIGHLIGHTS



2 operation modes
Single nailing / continuous nailing with contact actuation.



Remaining nail quantity
The magazine features a transparent cover and red indicator to easily check the remaining nail quantity.



Easy jamm clearing
Nails can be removed without tools in case of jamming.



Anti-dry fire mechanism
Avoids dry firing by locking the contact arm when the number of the remaining nails gets low.

ACCESSORIES

Brad nails	Code	Diameter	Length	Type
	F-31867	1,0 x 1,2 mm	15 mm	18 GA
	F-31870	1,0 x 1,2 mm	20 mm	18 GA
	F-31883	1,0 x 1,2 mm	25 mm	18 GA
	F-31896	1,0 x 1,2 mm	30 mm	18 GA
	F-31902	1,0 x 1,2 mm	32 mm	18 GA
	F-31915	1,0 x 1,2 mm	35 mm	18 GA
	F-31928	1,0 x 1,2 mm	38 mm	18 GA
	F-31931	1,0 x 1,2 mm	40 mm	18 GA
	F-31944	1,0 x 1,2 mm	45 mm	18 GA
	F-31957	1,0 x 1,2 mm	50 mm	18 GA

Hook
346317-0

Nose adapter
422B81-0



NOISE AND VIBRATION

Sound pressure level: **82 dB(A)**, Sound power level: **93 dB(A)**, Vibration level: **2,5 m/s²**

COMPATIBILITY

Recommended: **BL1815N, BL1820B, BL1830B, BL1840B, BL1850B, BL1860B**

RELATED PRODUCTS



18 V LXT
DBN900
Cordless framing nailer



18 V LXT
DFN350
Cordless brad nailer



18 V LXT
DPT353
Cordless pin nailer



18 V LXT
DBN601
Cordless finish nailer



18 V LXT
DBN620
Cordless finish nailer



AVAILABLE AS

DST630Z without battery and charger

USER BENEFITS

- Suitable for attaching moldings, trim and other light wood components, installing paneling, furniture makers, upholsterers ...
- Rapid firing capability has been achieved by incorporating a pneumatic spring structure driven by a BL motor
- Window for checking remaining staple quantity
- LED light with preglow and afterglow functions
- Belt hook can be attached on either left or right side
- Staples can be removed without tools in case of jamming

TECHNICAL SPECIFICATIONS

Accumulator voltage	18 V LXT
Magazine capacity	110
Staple height	9,5-38 mm
Staple width	5,7-6,35 mm
Wire width/thickness	1,25/1,05 mm
Staple type	18 GA
Dimensions (L×W×H)	264 x 111 x 282 mm
Weight*	3,1 kg

*With BL1860B battery

PRODUCT HIGHLIGHTS



Anti-dry fire mechanism
When the remaining staples reach 5 to 7, the tool automatically stops to avoid dry firing.



2 operation modes
Single stapling / continuous stapling with contact actuation.







Slim nose
Slim nose with good line of sight for better visibility when driving staples.



Driving depth adjustment
Accurate depth adjustment by dial.

ACCESSORIES

Staples	Code	Width	Height	Type
	F-33607	6,35 mm	25 mm	18 GA
	F-33610	6,35 mm	28 mm	18 GA
	F-33623	6,35 mm	30 mm	18 GA
	F-33636	6,35 mm	32 mm	18 GA
	F-33649	6,35 mm	38 mm	18 GA
Hook 346317-0	Inner tray 836306-8	Nose adapter 422B94-1		
				



NOISE AND VIBRATION

Sound pressure level: **79 dB(A)**, Vibration level: **2,5 m/s²**



COMPATIBILITY

Recommended: **BL1815N, BL1820B, BL1830B, BL1840B, BL1850B, BL1860B**

RELATED PRODUCTS



18 V LXT
DST221
Cordless stapler



AVAILABLE AS

DTD158Z without battery and charger

USER BENEFITS


- Suitable for professional tradespeople in construction, installation, carpentry and general contracting who need a compact yet strong impact driver, as well as electricians, plumbers, maintenance and service technicians and also advanced DIY users seeking professional-grade capability at an affordable price
- Designed with enhanced price competitiveness, maintaining the performance while reducing cost through optimised components
- High fastening performance, enabling efficient tightening of machine screws, bolts and coarse thread screws
- Variable speed control by trigger allows precise fastening across different materials and screw sizes
- Electric brake increases productivity and user safety by stopping rotation quickly after the trigger is released

TECHNICAL SPECIFICATIONS

Accumulator voltage	18 V LXT
No load speed	0-3.400 min ⁻¹
Impacts per min	0-3.600 min ⁻¹
Hex shank	1/4"
Standard bolt / machine screw	M5 - M16 / M4 - M8
High strength bolt / coarse thread screw	M5 - M14 / 22-125 mm
Max. fastening torque	170 Nm
Dimensions (L×W×H)*	125 x 81 x 251 mm
Weight*	1,6 kg

*With BL1860B battery

PRODUCT HIGHLIGHTS



Optimised battery position
The battery is positioned 12 mm further back to shift the centre of gravity closer to the grip line, reducing wrist strain and improving handling during prolonged use.



One-touch bit installation
Allows quick accessory changes without pulling the bit sleeve, enabling smoother workflow and reducing downtime during frequent bit swaps on the job.



Ergonomic soft-grip handle
A carefully designed handle with soft grip enhances comfort and control, reducing hand fatigue and improving stability during extended operation.



LED light with pre-glow and after-glow functions
The built-in LED light illuminates the work area before and after activation, ensuring better visibility and safer handling in dim or confined spaces.

ACCESSORIES

Inner tray for Makpac case type 2
837916-4



Hook - long
346317-0



Tool hanger
191K57-9



NOISE AND VIBRATION

Sound pressure level: **97 dB(A)**, Sound power level: **105 dB(A)**, Vibration level: **10.9 m/s²**

COMPATIBILITY

Recommended: **BL1815N, BLB182, BL1820B, BL1830B, BL1840B, BL1850B, BL1860B** Compatible: **BL18120, BL1890**

RELATED PRODUCTS



18 V LXT
DDF490
Cordless driver drill



18 V LXT
DDHP490
Cordless hammer driver drill



18 V LXT
DJV186
Cordless jig saw



18 V LXT
DTM53
Cordless multitool



DDF490 / DHP490

CORDLESS HAMMER DRIVER DRILL / DRIVER DRILL



DDF490



DHP490

AVAILABLE AS

DDF490Z without battery and charger

DDF490WV with BLB182 battery, charger DCB18WA and plastic carrying case

DDF490WVE with two BLB182 batteries, charger DCB18WA and plastic carrying

DDF490WVX7 with two BLB182 batteries, charger DCB18WA and metal carrying case with accessories

DDF490RFJ with two BL1830B batteries, charger DC18RC and Makpac type 2 case

DHP490Z without battery and charger

DHP490WV with BLB182 battery, charger DCB18WA and plastic carrying case

DHP490WVE with two BLB182 batteries, charger DCB18WA and plastic case

DHPWVX7 with two BLB182 batteries, charger DCB18WA and metal carrying case with accessories

PRODUCT HIGHLIGHTS




Single sleeve keyless chuck allows for easy bit installation/removal with one hand



Variable speed control by trigger allows for speed adjustments based on the material or application.

Battery and charger compatibility

LXT batteries can only be charged with LXT battery chargers and LXT BASIC battery can only be charged with the LXT BASIC battery charger.

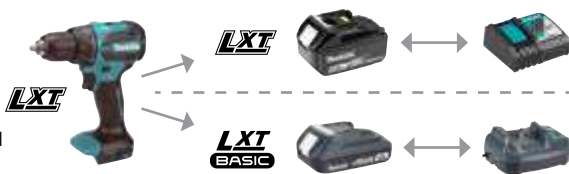

NOISE AND VIBRATION

Sound pressure level: **78 / 88 dB(A)**,
Sound power level: **- / 96 dB(A)**,
Vibration level: **2,5 (metal) / 8,1 (concrete) m/s²**

COMPATIBILITY

Recommended: **BL1815N, BLB182, BL1820, BL1830, BL1840, BL1850, BL1820B, BL1830B, BL1840B, BL1850B, BL1860B**

RELATED PRODUCTS



LXT 18 V
DDF485
Cordless driver drill



LXT 18 V
DHP485
Cordless hammer driver drill

USER BENEFITS

- The 20-stage torque settings allow for fine adjustments to suit the task at hand.
- A mechanical 2-speed gearing allows for choosing between maximum rpm or higher torque.
- A single LED light with pre-glow and after-glow functions illuminate the work area.
- The variable speed trigger allows for speed adjustments based on the material or application.
- A convenient 13 mm (1/2") keyless chuck for quick bit changes.
- Water-resistance compatible with XPT, except when the BLB182 battery is installed
- The (optional) hook allows for easy and convenient hanging of the tool.
- The battery protection circuit protects against overloading, over-discharging and over-heating.

TECHNICAL SPECIFICATIONS

	DDF490	DHP490
Accumulator voltage	18 V LXT	
No load speed	0 - 500/1.900 min ⁻¹	
Drilling capacity (Steel/wood/masonry)	13/38/- mm	13/38/13 mm
Max fastening torque	65 Nm	
Chuck capacity	13 mm	
Dimensions (L×W×H) ^{*1}	167 x 81 x 237 mm	172 x 81 x 237 mm
Weight ^{*2}	1,7 kg	1,7 kg

^{*1}With BLB182 battery¹ ^{*2}With BL1860B battery

ACCESSORIES

Short hook
(for LXT batteries 1,5 / 2 Ah)
346449-3



Long hook
(for LXT batteries 3 / 4 / 5 / 6 Ah)
346317-0



Charging Time

18V LITHIUM-ION Not compatible with charger DCB18WA	FAST Charging DC18RC	DC18SD
	BL1815N 1,5 Ah	15 min
BL1820B 2,0 Ah	24 min	45 min
BL1830B 3,0 Ah	22 min	60 min
BL1840B 4,0 Ah	36 min	90 min
BL1850B 5,0 Ah	45 min	110 min
BL1860B 6,0Ah	55 min	130 min

18V LITHIUM-ION Compatible with charger DCB18WA only	LXT BASIC	DC18SD
BLB182 2,0 Ah		90 min



www.makita-see.com

Makita Group reserves the right to make changes in this leaflet and the right to information in all forms and methods in connection with this leaflet. Pictures may differ from real products.



AVAILABLE AS

LH001GZ without battery and charger

PRODUCT HIGHLIGHTS



Rip fence secured at both ends
Minimizes bending when the workpiece is pressed against it, enhancing cutting accuracy in table saw mode.



Precise adjustable table height
The rack-and-pinion mechanism enables smooth, accurate table height adjustments, supporting controlled and stable cutting when working with different materials and applications.



Advanced dust collection efficiency
A redesigned airflow path significantly improves dust capture in table saw mode, reducing dust emission from the blade cover and enhancing overall workplace cleanliness.



Integrated push-stick storage
The push stick stores neatly on the blade cover to prevent loss, while the cover itself doubles as storage to avoid accidental disposal—addressing cases where blade covers were previously mistaken for packaging and thrown away.

NOISE AND VIBRATION

Sound pressure level: **91 dB(A)**, Sound power level: **103 dB(A)**

COMPATIBILITY

Recommended: **BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL4080H**
Compatible: **BL4020**

USER BENEFITS

- Suitable for carpenters, furniture makers, interior installers, renovation contractors and small workshop users who need a precise, portable mitre/table saw with strong dust control, high cutting efficiency and wireless vacuum activation for cleaner, faster and more controlled on-site work
- LED job light with cut-line guide casts a precise shadow of the blade to support accurate cutting.
- Rip fence is secured at both ends to increase cutting accuracy, even when the workpiece is pressed firmly.
- AWS vacuum switch enables starting the connected vacuum cleaner with the blade stopped for convenient cleaning.
- A switch that activates only the vacuum cleaner via AWS makes it easier to clean the tool after use.
- Anti-restart function minimizes accidental start-up
- Electric brake that stops the blade for user protection

TECHNICAL SPECIFICATIONS

Accumulator voltage	40 V XGT
No load speed	4.300 min ⁻¹
Saw blade diameter Ø	255/260 mm
Hole diameter Ø	15,88/25,4/30 mm
Bevel angle: left/right	45° / 0°
Miter angle: left/right	45° / 52°
Max cutting capacity 0°	69 × 130 mm / 93 × 95 mm
Max cutting capacity (table-saw)	40 mm
Dimensions (L×W×H)*1	545 x 476 x 585 mm
Weight*2	16.0 kg

*1 With BL4040 battery | *2 With BL4080F battery

ACCESSORIES

MAKBLADE PLUS saw blade for wood, 255x30x40Z B-32471 **MAKBLADE PLUS saw blade for wood, 260x30x100Z** B-32633 **TCT SPECIALIZED saw blade for alu., 260x30x100Z** B-33336



SPECIALIZED saw blade for wood with nails, 260x30x64Z B-42391

TCT saw blade for wood, 260x30x40Z D-77322

TCT EFFICUT saw blade for composite decking, 260x30x75Z E-12273



Dust bag 122852-0

Push stick 416772-1



RELATED PRODUCTS



40 V XGT
LS004G
Cordless Slide
Compound
Miter Saw



40 V XGT
RS002G
Cordless Rear
Handle Saw


AVAILABLE AS

PB003GZ without battery and charger

USER BENEFITS

- Produces clean straight cuts with minimal sparks ideal for cutting pipes, tubes, conduits and metal bars used in plumbing, electrical work and HVAC.
- Powerful and fast cutting for a wide range of materials.
- Equipped with constant speed control that minimizes RPM drop under heavy load.
- Externally adjustable blade tracking.
- Large tool hook for hanging the tool on ladders...
- LED light with diffusion lens reduces blade shadows making it easier to align the blade with the cutting line.

TECHNICAL SPECIFICATIONS

Accumulator voltage	40 V max XGT
Blade speed	0-3,2 m/s
Blade (L×W)	835x13 mm
Blade thickness	0,5 mm
Cutting capacity of square pipe	66x66 mm
Cutting capacity of round pipe	66 mm
Dimensions (L×W×H)*	392 x 175 x 244 mm
Weight*	4,0 kg

* With BL4020 battery

PRODUCT HIGHLIGHTS


Easy blade installation / removal
Exposed wheel design allows easy blade replacement.



Adjustable stopper plate
Provides improved workpiece support while cutting and can be adjusted without the use of tools.



Stand (optional)
The stand features a slanted clamping vise that ensures secure and stable cutting. Cutting capacity with stand: round pipe 55 mm, square pipe 55x55 mm.

Dial	Speed	Application
1	1,3 m/s	Stainless steel, alloy steel
2	1,5 m/s	Steel materials (solid round bar, structural steel, thick steel pipe, etc.)
3	2,1 m/s	
4	2,5 m/s	
5	2,9 m/s	Steel materials (thin steel pipe, etc.)
6	3,2 m/s	


NOISE AND VIBRATION

Sound pressure level: **82 dB(A)**, Sound power level: **90 dB(A)**, Vibration level: **1,4 m/s²**


COMPATIBILITY

Recommended: **BL4020, BL4025, BL4040, BL4040F**
Compatible: **BL4050F, BL4080F, BL4080H**

ACCESSORIES

Stand
1917F0-6



Cutting wax
191897-9



Grip
158237-4



Band saw blades BiM (5 pcs)	Code	No. of teeth	Width	Material
	B-40543	14	3-6 mm	Plastics and non-ferrous metal. Mild steel, cast steel and cast iron. Hard steel and stainless steel.
	B-40559	18	2-3 mm	
	B-40565	24	<2 mm	

RELATED PRODUCTS


40 V max XGT
PB002G
Portable band saw



18 V LXT
DPB183
Portable band saw


AVAILABLE AS

BS002GZ without battery and charger

USER BENEFITS

- Suitable professional metalworkers who need a powerful cordless tool for grinding, finishing and polishing metal pipes and other curved surfaces.
- Equipped with an electric brake and anti-restart function for user protection
- Constant speed control for stable grinding, polishing, and finishing operations
- Soft start feature for smooth start-up

TECHNICAL SPECIFICATIONS

Accumulator voltage	40 V max XGT
Belt speed	190-810 m/min
Belt size	40x760 mm
Maximum diameter of metal pipes (Ø)	125 mm
Dimensions (L×W×H)*	580 x 197 x 356 mm
Weight*	4,0 kg

*1 With BL4020 battery

PRODUCT HIGHLIGHTS


Easy belt change
Push the side grip all the way in, then remove the belt.



Roller guides
With raised edges designed to minimize belt disengagement.



Stepless belt speed adjustment over a wide range for different applications

Dial	Belt speed	Application
1	3,1m/s [190m/min]	Grinding and polishing of stainless steel, finishing work
2	3,8m/s [230m/min]	
3	5,8m/s [350m/min]	
4	7,9m/s [470m/min]	Rust and paint removal, for rough grinding
5	13,5m/s [810m/min]	


NOISE AND VIBRATION

Sound pressure level: **83 dB(A)**, Sound power level: **91 dB(A)**,
Vibration level: **1,9 m/s²**


COMPATIBILITY

Recommended: **BL4020, BL4025, BL4040, BL4040F, BL4050F** Compatible: **BL4080F, BL4080H**

ACCESSORIES

Plastic grip
1910X6-8



P40 abrasive belt
D-80927



P60 abrasive belt
D-80933



P80 abrasive belt
D-80949



P120 abrasive belt
D-80955



Rough sanding belt
D-80977



Medium sanding belt
D-80983



Fine sanding belt
D-80999


RELATED PRODUCTS


40 V max XGT
GA023G
Cordless angle
grinder



40 V max XGT
GD001G
Cordless die
grinder



18 V LXT
DBS180
Cordless Belt Sander



AVAILABLE AS

UH023GZ without battery and charger

USER BENEFITS


- Suitable for professional landscapers and garden-care workers who need a compact, lightweight hedge trimmer for precise trimming and efficient work in tight spaces.
- Designed for topiary work, the lightweight bar-handle design and compact protector provide excellent manoeuvrability.
- The brushless motor delivers the power and cutting performance required by professionals, while maintaining a compact and lightweight build.
- An aluminium cooling fan increases cooling efficiency for smoother cutting and reduces the risk of jamming when working with thicker branches.
- Three-facet, obliquely ground blades grip branches securely for reliable cutting and produce a clean, high-quality finish.
- A lubrication port allows straightforward grease application for easier maintenance.
- Equipped with an electric brake and an anti-restart function to enhance user safety.
- A battery protection circuit guards against overloading, over-discharging and overheating.

TECHNICAL SPECIFICATIONS

Accumulator voltage	40 V max XGT
No load speed	1.800 min ⁻¹
Cutting strokes per minute	3.600 min ⁻¹
Blade length	200 mm
Maximum cutting diameter	8 mm
Dimensions (L×W×H)*	563 x 80 x 124 mm
Weight*	1.8 kg

* With BL4020 battery


PRODUCT HIGHLIGHTS



Comfortable handling
The centre of gravity is close to the grip for easy manoeuvrability, with a slim 80 mm body that enables effective work in tight spaces.



Chip sweeper assembly
Efficiently sweeps away branches and leaves to both sides during left-right reciprocating trimming, thanks to the double-sided shear blades.



Durable metal gearing
Engineered for long service life, the UH023G uses metal gears and bearings, plus a reinforced crank contact area, ensuring higher durability and reduced risk of blade detachment under load.



Compact, lightweight trimming
Designed for precise and detailed trimming, the UH023G features a slim 80 mm body and a low centre of gravity, offering excellent handling in tight spaces and reducing wrist strain during extended use.

ACCESSORIES

Hedge trimmer blade
1916V9-4

Machine grease
199450



NOISE AND VIBRATION

Sound pressure level: **74 dB(A)**, Sound power level: **84 dB(A)**,
Vibration level: **1,3 m/s²**



COMPATIBILITY

Recommended: **BL4040F, BL4040, BL4025, BL4020**
Compatible: **BL4080H, BL4080F, BL4050F**

RELATED PRODUCTS




AVAILABLE AS
UB005GZ without battery and charger

USER BENEFITS

- Suitable for professionals who need a high-performance cordless blower vacuum for demanding outdoor cleaning and grounds maintenance work.
- Two-speed modes with front-button selection: high mode delivers powerful blowing, low mode reduces small-stone pickup when vacuuming leaves and extends blower runtime.
- The variable-speed trigger allows for speed adjustments based on the application
- A cruise-control lever helps reduce finger fatigue during continuous use
- Single-action lever for selecting blower or vacuum mode
- Excellent balance for easy handling, even with a high-capacity BL4080F or BL4080H battery installed
- The mode switch button provides tactile feedback for quick switching between high and low modes
- Wide nozzle with a redesigned opening and airflow path reduces clogging with fallen leaves
- Comfortable shoulder strap with thick padding reduces pressure on the shoulder contact area.

TECHNICAL SPECIFICATIONS

Accumulator voltage	40 V max XGT
Blowing force	4,0 / 5,0 N
Air velocity	78,0 / 87,0 m/s
Max air volume (blowing)	3,1 / 3,5 m ³ /min
Max air volume (vacuuming)	6,2 / 6,8 m ³ /min
Dust bag capacity	25 l
Dimensions (L×W×H)	1169 x 184 x 412 mm
Weight*	4,4 kg

** With BL4020 battery*
PRODUCT HIGHLIGHTS



LED job light
The machine is equipped with an LED job light, making it easier to spot leaves and debris in low-light conditions and improving vacuuming performance.



Wide-opening dust bag
The side opens wide for easier emptying.



Easy foreign-object removal
Open the fan cover with the thumbscrew to remove tangled plastic string and other debris.



Mulching function
High-durability metal shredder significantly reduces leaf volume during vacuuming.

The machine will not start when the fan cover is open.


ACCESSORIES

Hose
1918R3-0

Nozzle
1918B8-8

Harness cover set
1917G3-7


NOISE AND VIBRATION

Sound pressure level: **88 dB(A)**, Sound power level: **99,6 dB(A)**, Vibration level: **1,3 m/s²**

COMPATIBILITY

Recommended: **BL4040F, BL4050F, BL4080F, BL4080H, PDC01, PDC1200, PDC1500** Suitable: **BL4020, BL4025, BL4040**

RELATED PRODUCTS
